

# Uni Tube Cable CST Armoured

ID: **Z145**




KABELOVNA Děčín Podmokly s.r.o.  
Ústecká 840/33, 405 33 Děčín 5  
Czech Republic  
DIČ CZ26759993  
tel.: +420 412 706 222  
www.kabelovna.cz

4.4.2013 ver.1

## J/A-DQ(ZN)(SR)H WBF max. 24F

This cable is suitable for indoor or outdoor installation. The cable has full rodent protection, direct burial possible.

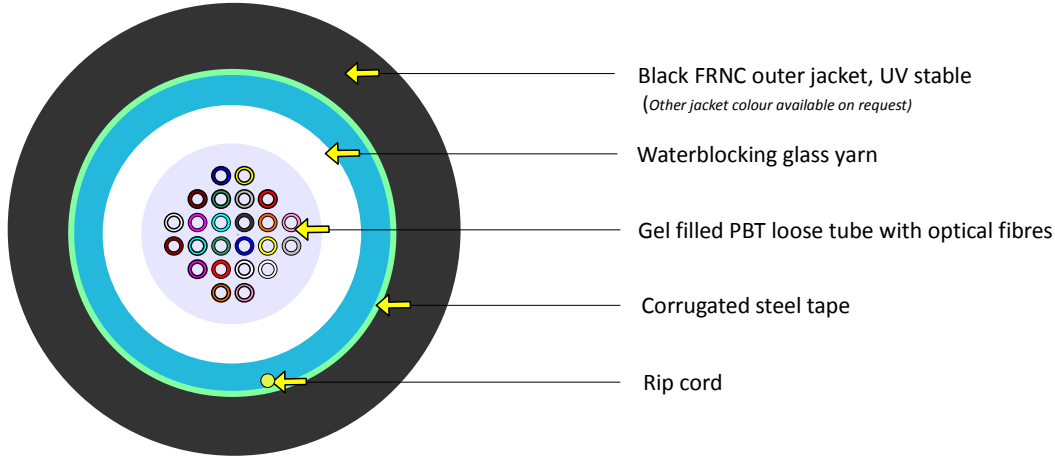

### Fibre colour coding

According to IEC 60304

1 Red	7 Brown	13 Red*	19 Brown*
2 Green	8 Violet	14 Green*	20 Violet*
3 Blue	9 Turquoise	15 Blue*	21 Turquoise*
4 Yellow	10 Black	16 Yellow*	22 Natural*
5 White	11 Orange	17 White*	23 Orange*
6 Grey	12 Pink	18 Grey*	24 Pink*

\* with black rings

Other fibre colour sequences available on request

### Fibre Type

Single mode fiber 9/125

Multi mode fiber 50/125

Multi mode fiber 62,5/125

See the Fibre Specification sheet

### Sheat Marking

Print colour	White
Print method	INK-Jet
Print legend	manufacturer's name, cable type job number, length marking @ 1 m intervals

Other print legends available on request

### Suitable for indoor use

Flammability	EN 50266-1, EN 50266-2-2
Acid gases	EN 50267-1, EN 50267-2-2, EN 50267-2-3
Smoke density	EN 61034-1, EN 61034-2

### Order example

2100 m J/A-DQ(ZN)(SR)H WBF 24E9/125G.652D jacket colour BLK, cable specification Z145

### Mechanical and Environmental properties

Max. tensile strength	*E1A	1100 N
Crush resistance	*E3	6000 N/10cm
Impact resistance	*E4	3 impacts (w/25N.m)
Min. bend radius	*E11A	15× cable diameter
	*E11B	20× cable diameter (load)
Moisture resistance	*F5	passed
Compound flow	*E14	30 cm / 24h / 70°C passed
Temperature range	*F1	
	installation	-15 °C to +50 °C
	operation	-20 °C to +60 °C
	storage	-30 °C to +70 °C
Standard put-up length		2100 m, 4100 m
Packaging		Plywood
Cable informative nominal weight (calc.)		87 kg/km
Loose tube diameter		3,0 mm
Outer jacket thickness		1,3 ± 0,2 mm
Cable outer diameter		7,9 ± 0,4 mm
		(measured acc..to EN 60811-1-1)

\* IEC 60794-1-2

Note: When installing or assembly under temperature below 5°C cable has to be stock in temp of 20°C at least 24h before installation.

Cable life time - minimum 30 years

